



Linear Drainage

P12-GRATES ^{Z882}
Drainage System


Perma-Trench



P12-BG-L

GALVANISED BAR GRATE - LIGHT DUTY

Dimensional Data (mm) are Subject to Manufacturing Tolerances and Change Without Notice

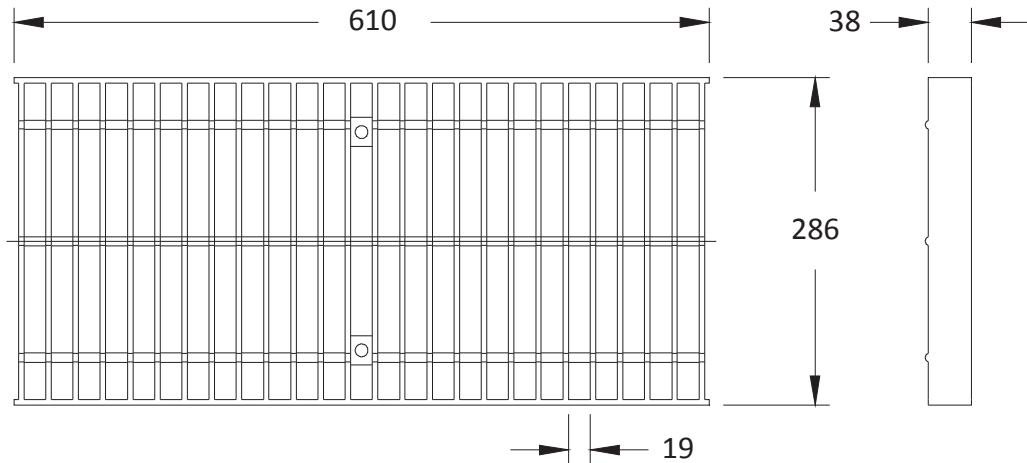

ENGINEERING SPECIFICATION - P12-BG-L

- Slotted Bar, Galvanised Steel grate
- 286mm wide by 610mm long
- Weighing 20.69kg per lineal metre
- Grate has an open area of 215688.33mm² per lineal metre


BG-L - Slotted Bar

Material:	Galvanised Mild Steel
Weight:	* 20.69kg
Open Area:	* 215688.33mm ²
Slot Width/Hole Size:	19mm
Optional Frame:	HDF / HDG

* = per lineal metre

LOAD CLASS RATING:

- Rated B - must be used with frame assembly



CERTIFICATIONS


- Independently certified to AS3996-2006



P12-DGE

DUCTILE IRON SLOTTED GRATE

Dimensional Data (mm) are Subject to Manufacturing Tolerances and Change Without Notice

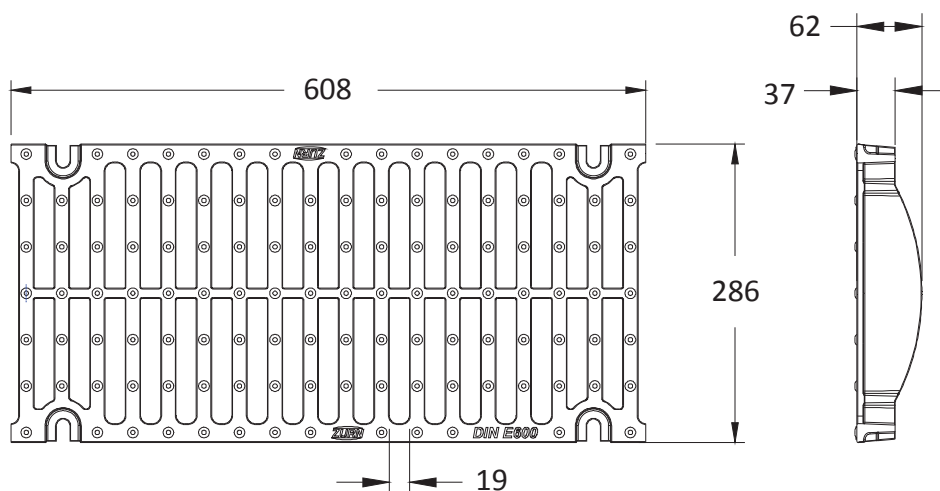

ENGINEERING SPECIFICATION - P12-DGE

- Slotted Ductile Iron grate
- 286mm wide by 608mm long
- Weighing 29.47kg per lineal metre
- Grate has an open area of 127634.62mm² per lineal metre

DGE - Slotted Ductile

Material: Ductile Iron

Weight: * 29.47kg

Open Area: *127634.62mm²

Slot Width/Hole Size: 19mm

Optional Frame: HDF / HDG

* = per lineal metre

LOAD CLASS RATING:

- Rated F - must be used with frame assembly



CERTIFICATIONS


- Independently certified to AS3996-2006



P12-GHPDE

GALVANISED DUCTILE IRON HEELPROOF LONGITUDINAL GRATE

Dimensional Data (mm) are Subject to Manufacturing Tolerances and Change Without Notice

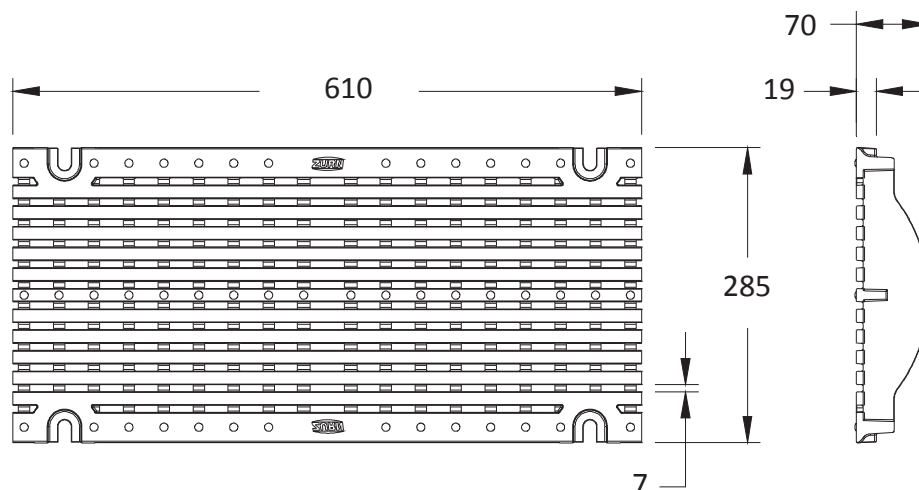

ENGINEERING SPECIFICATION - P12-GHPDE

- HeelProof Longitudinal, Galvanised Ductile Iron grate
- 285mm wide by 610mm long
- Weighing 44.05kg per lineal metre
- Grate has an open area of 63288.33mm² per lineal metre


GHPDE - Galvanised HeelProof

Material:	Galvanised Ductile Iron
Weight:	* 44.05kg
Open Area:	* 63288.33mm ²
Slot Width/Hole Size:	7mm
Optional Frame:	HDF / HDG

* = per lineal metre

LOAD CLASS RATING:

- Rated F - must be used with frame assembly



CERTIFICATIONS


- Independently certified to AS3996-2006
- AS1428.2 (A&M) Compliant



P12-HPDE

DUCTILE IRON HEELPROOF LONGITUDINAL GRATE

Dimensional Data (mm) are Subject to Manufacturing Tolerances and Change Without Notice

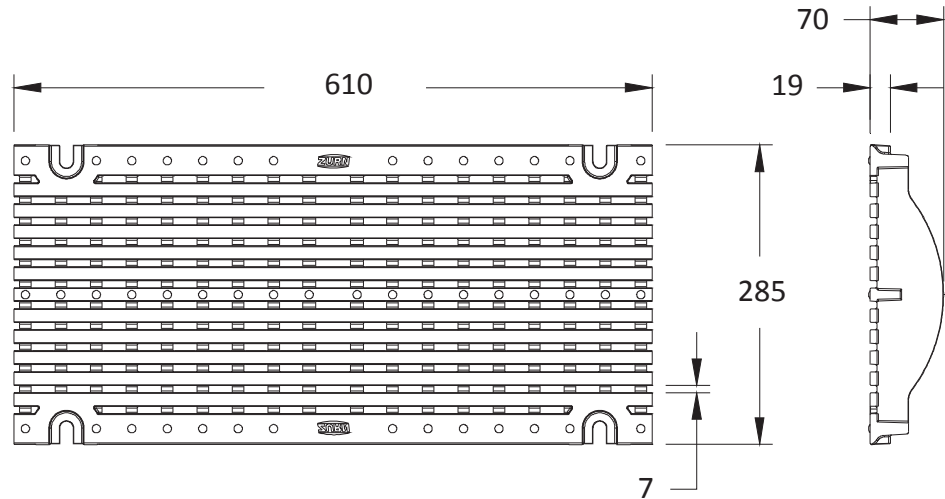

ENGINEERING SPECIFICATION - P12-HPDE

- HeelProof Longitudinal Ductile Iron grate
- 285mm wide by 610mm long
- Weighing 44.05kg per lineal metre
- Grate has an open area of 63288.33mm² per lineal metre

HPDE - HeelProof Ductile

Material:	Ductile Iron
Weight:	* 44.05kg
Open Area:	* 63288.33mm ²
Slot Width/Hole Size:	7mm
Optional Frame:	HDF / HDG

* = per lineal metre

LOAD CLASS RATING:

- Rated F - must be used with frame assembly



CERTIFICATIONS

- Independently certified to AS3996-2006
- Independently certified to AS4586 (Slip)
- AS1428.2 (A&M) Compliant



AS 4586 Certified
Non-Slip



AS 1428.2
Accessibility &
Mobility Compliant



Bike Safe




Heel Proof

P12-RFSC

REINFORCED SLOTTED STAINLESS STEEL GRATE

Dimensional Data (mm) are Subject to Manufacturing Tolerances and Change Without Notice

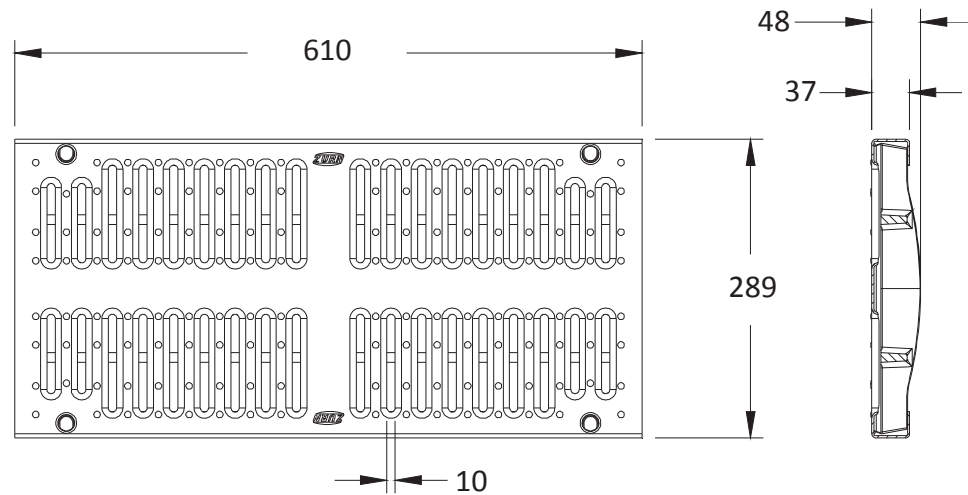

ENGINEERING SPECIFICATION - P12-RFSC

- Reinforced Slotted Stainless Steel grate
- 289mm wide by 610mm long
- Weighing 31.7kg per lineal metre
- Grate has an open area of 42756.67mm² per lineal metre

RFSC - Domestic Stainless

Material: 304 Stainless Steel

Weight: * 31.7kg

Open Area: * 42756.67mm²


Slot Width/Hole Size: 10mm

Optional Frame: HDS

* = per lineal metre

LOAD CLASS RATING:

- Rated D - must be used with frame assembly



CERTIFICATIONS

- Independently certified to AS3996-2006
- Independently certified to AS1428.2 (A&M)





ZURN AUSTRALIA
49 LAKESIDE DRIVE BROADMEADOWS VIC 3047
PHONE: 1300 00 ZURN FAX: 03 9357 1455
