

304P-PP-PWD

STAINLESS STEEL PWD PATTERN ABLUTION TROUGH

Dimensional Data (mm) are Subject to Manufacturing Tolerances and Change Without Notice



304P-PWD-1200

*Specify outlet position when ordering - left hand or right hand



DF-260



Z-80300

ENGINEERING SPECIFICATION - 304P-PP-PWD

- PWD Pattern trough pre-plumbed with choice of bubblers/taps/com-bination.
- Reduces installation time & cost
- Refer to 304P-PWD Product Specification for details on PWD trough
- Refer to DF-260 Specification for details on bubbler
- Refer to Z-80300 Specification for detail on taps

PRODUCT INFORMATION

304P-PWD FEATURES


- Fully welded
- 25mm radius corners for safety and ease of cleaning
- Brackets included
- 50mm plug & waste included
- 40mm deep splashback to accomodate plumbing
- Satin finish

304P-PWD OPTIONS


- Left or right outlet available

304P-PWD SIZES

900mm	1800mm
1200mm	2100mm
1500mm	2400mm

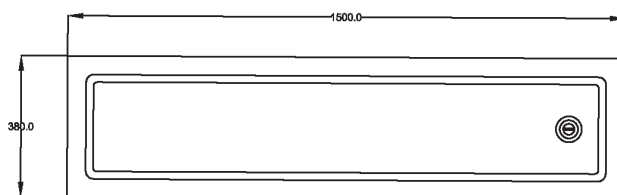

304P-PWD-1500

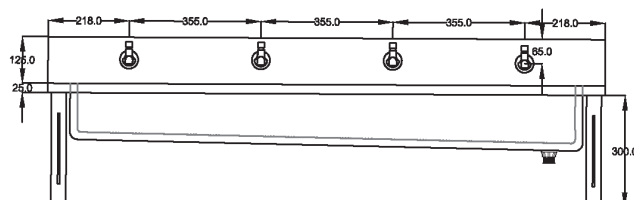

304P-PWD-1500

ORDERING NOTES:

- Specify outlet position - Left Hand OR Right Hand.
- Specify bubbler/tap combination required.
- Specify inlet position (at rear) - Left Hand OR Right Hand.