

ZDF-6154

CONVERSION CONCEALED DUAL FLUSH VALVE

Dimensional Data (mm) are Subject to Manufacturing Tolerances and Change Without Notice


ENGINEERING SPECIFICATION

- Conversion flush valve for pans / urinals
- Standard pan connection and urinal connection available
- Min water supply pressure - 40kPa
- Max water supply pressure - 300kPa
- Flush volume - 6 / 3L adjustable
- Flow rate required - 1.5L per sec




STANDARDS COMPLIANCE

- WELS – 3 Star – 3.6L
- WELS Registration No. L07407
- Watermarked Approved - WM-000307




ADAPTOR FITTED
TO SUIT OLDER
MODEL STOP
VALVE

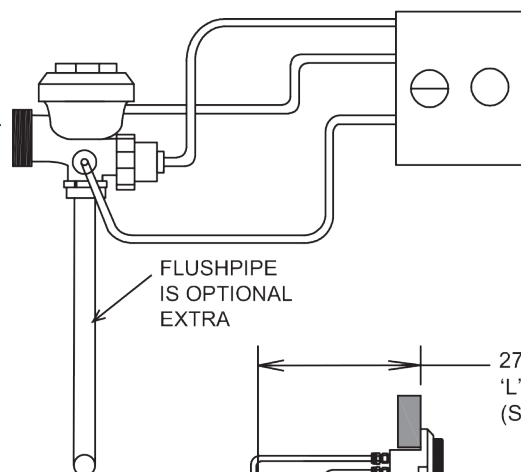

FLUSHPIPE
IS OPTIONAL
EXTRA

273 MAX
'L' DIMENSION
(SPECIFY)

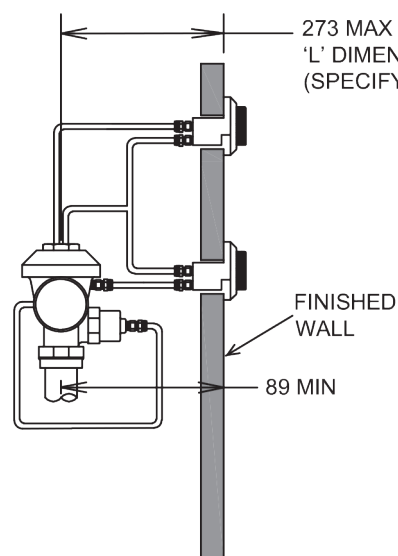

FINISHED
WALL

89 MIN

PRODUCT CODE

CODE	DESCRIPTION
ZDF-6154S	Zurn to Sloan conversion valve
ZDF-6154U	Zurn to Unibra conversion valve
ZDF-6154H	Zurn to Hush conversion valve
ZDF-6154G	Zurn to Gloria conversion valve
ZDF-6154P	Zurn to Pubco conversion valve

OPTIONS

CODE	DESCRIPTION
ZDF-6152BX12	300x300mm stainless steel panel and frame
ZDF-6152P	300x300mm s/s panel
FPCP-40	40x450x450mm chrome plated copper flush pipe
PH-6000-HYL-FF-SD	Small diameter flush buttons