



TAPWARE

Product Guide



ZURN.COM.AU

CONTENTS

TIMED FLOW TAPWARE	3
SPRING ACTION TAPS	4
DRINKING BUBBLERS	5
GLASS FILLERS	6
SHOWER ROSE	8
SHOWER TIMER	9
HANDSFREE OPERATED TAPWARE	10
PEDAL VALVES	12
URN TAP	16
TWIST WASTE VALVE	17
WASHDOWN GUN	18
AQUALISA TIMED FLOW CONTROL KIT	19
COMMERCIAL KITCHEN TAPWARE	20

TIMED FLOW TAPWARE



Z-80300



Z-86100



The timed flow taps are built to last. With solid DZR Brass construction these taps will suit any facility. 6 star WELS rating make these taps top of the range.

SPECIFICATIONS:

- > Timed flow
- > 150 – 350kPa inlet water pressure
- > 0 – 60°C water temperature
- > WELS – 6 star – 1.5L
- > WaterMark Approved - WM-002732

MODELS:

Wall Bib Tap (Z-80300)

Pillar Tap (Z-86100)

*Pillar taps also available with complete installation kit

SPRING ACTION TAPS

TOP ASSEMBLIES:



ST-12



ST-12L

The tapware range is perfectly suited for any commercial design layout.

SPECIFICATIONS:

- > Spring action, self closing
- > Dezincification chrome plated brass bodies and internals
- > 350kPa max. inlet water pressure
- > 75°C max. water temperature
- > 6 star WELS ratings
- > WaterMark Approved

MODELS:

- GSAI-16 - push button spring action tap
- GSAI-16L - lever spring action tap
- GSAI-13L - lever horizontal spring action tap




GSAI-16



GSAI-16L



GSAI-13L

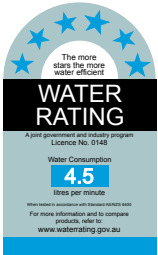

DRINKING BUBBLERS



DF-210



DF-215



DF-260B



DF-260



DF-240B



DF-240



These drinking bubblers were designed with safety and strength in mind. All bubblers come standard with rubber coated mouth piece for user protection. Bubblers in this range are easy to use and suitable for any age group.

SPECIFICATIONS:

- > 0 – 50°C water temperature
- > 150-500kPa inlet water pressure

MODELS:

- DF-260 - WELS 6 star 2.5L - WM-002732
- DF-240 - WELS 6 star 2.5L - WM-002732
- DF-215
- DF-210

OPTIONS:

- DF-240B / DF-260B - button type

VERTICAL GLASS FILLER



This vertical glass filler is perfectly suited for any commercial design layout.


SPECIFICATIONS:

- > 7/6" - 24 TPI
- > 350kPa max. inlet water pressure
- > 60°C max. water temperature

MODEL:

DF-230 - Vertical glass filler


MOUNTED GLASS FILLERS

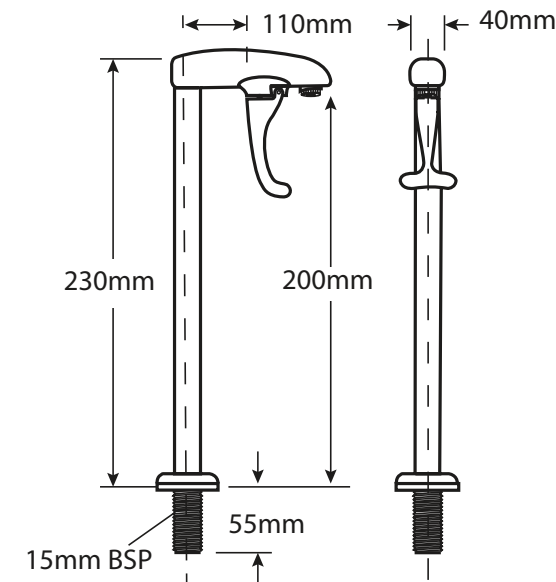

B-1210



B-1200

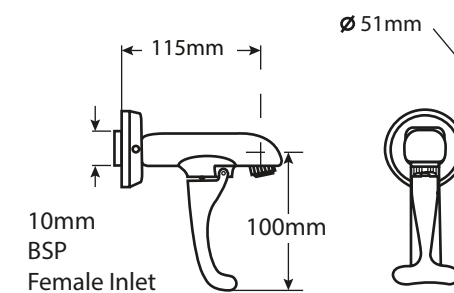

These T&S Mounted Glass Fillers are polished chrome with adjustable cover plates. B-1210 is pedestal mounted with 15mm male inlet and a height of 230mm whilst B-1200 is wall mounted with a 10mm female inlet. Perfectly suited for any commercial design layout.

FEATURES:

- > Polished chrome
- > Adjustable cover plate
- > Volume regulator
- > Lexan push-back arm
- > 350kPa max. inlet water pressure
- > 60°C max. water temperature

MODELS:

B-1210 - Pedestal mounted glass filler

B-1200 - Wall mounted glass filler

Note: All dimensions are for reference only. Do not use for pre-plumbing

SHOWER ROSE




This shower rose is designed for the harshest environments and installations. It is jail safe and suitable for prisons, holding cells, institutional facilities and heavy vandal prone areas.

SPECIFICATIONS:


- > Flow controlled to 9L/min
- > Removeable spray plate for cleaning
- > Ligature resistant
- > Vandal Resistant
- > Ideal for prisons and public showers
- > 60°C max. water temperature
- > WELS – 3 star – 9L
- > WaterMark Approved - WM-022449

MODEL:

AV-CS9 - Shower rose

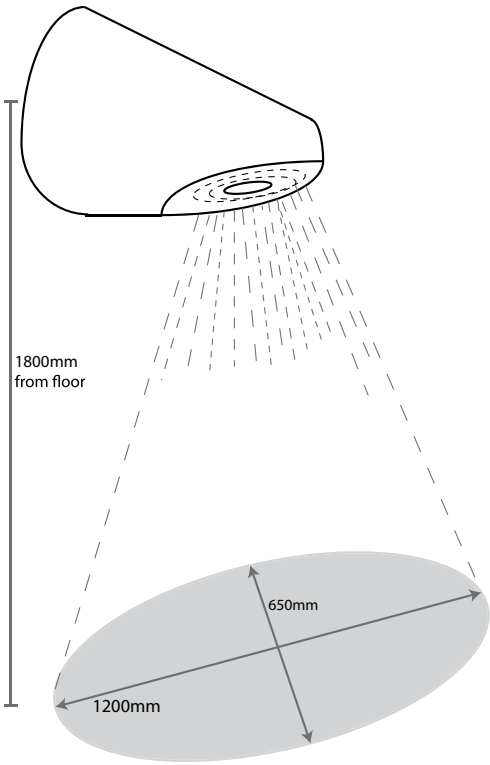

SHOWER TIMER

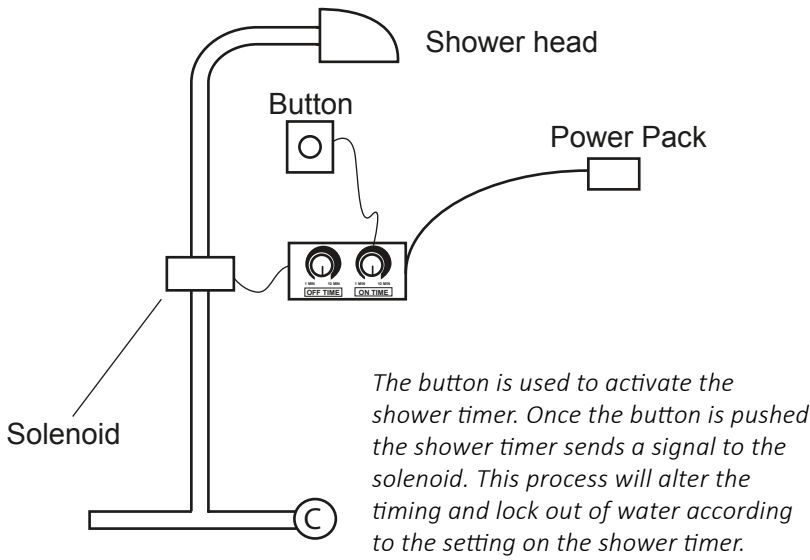

The shower timer is a water control product that can manage the amount of time a user can have a shower and the amount of time required before it can be activated again. Suitable for prisons, holding cells, institutional facilities and public areas.

SPECIFICATIONS:

- > Adjustable run time 1 – 10 min
- > Adjustable Lock out or “Dead” time 1 – 10 min
- > 60°C max. water temperature
- > WELS – 3 star – 9L
- > WaterMark Approved - WM-022449

MODELS:

AV-ST - Control unit, power pack, ½” solenoid valve, low voltage piezo button

AV-STKIT - Control unit, power pack, ½” solenoid valve, low voltage piezo button, anti-vandal resistant showerhead



KNEE OPERATED TAPWARE



The knee operated valve is part of our hands free tapware range. These valves are extremely robust and long lasting. These are a timed flow valve which can be held in the on position to allow the user a greater amount of time. Hygienic hands free activation for use in hospitals, kitchens and laboratories.


SPECIFICATIONS:

- > 15mm BSP inlet and outlet
- > 7 second run time (factory set)
- > 0 – 60°C water temperature
- > 150 – 350kPa inlet water pressure
- > WELS – 5 Star – 5.5L
- > Watermarked Approved - WM-002732

MODELS:

TF-735G - Knee operated valve with WELS approved gooseneck outlet

TF-735KIT - Knee operated valve with WELS approved gooseneck outlet and installation kit




TF-735KIT

FOOT OPERATED TAPWARE



GSAI-25XA

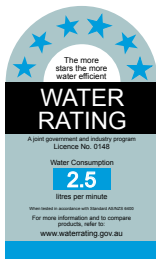

The foot operated valve range is designed for the harshest of environments. These valves are the easiest and most economical way to go hands free. Available in both 45 degree and straight configurations, valve only or with a complete installation kit.

SPECIFICATIONS:

- > 15mm BSP inlet and outlet
- > Spring action
- > 0 – 70°C water temperature
- > 150 – 300kPa inlet water pressure
- > WELS – 6 Star – 2.5L
- > Watermark Approved - WM-002732

MODELS:

GSAI-25XA	45deg foot valve only
GSAI-25XS	Straight foot valve only
GSAI-25XAKIT	45deg foot valve with installation kit
GSAI-25XSKIT	Straight foot valve with installation kit



GSAI-25XS

SINGLE WALL MOUNTED PEDAL VALVE



The single wall mounted pedal valve has a brass body with a polished chrome plated finish. It can be used for hot or cold water.


SPECIFICATIONS:

- > Wall mounted
- > Extended pedal
- > Aluminium pedal with satin finish
- > Pedal flips upward for ease of cleaning

PRODUCTS:

B-508-K - Single pedal valve, wall mount
w/ gooseneck outlet

B-50P - Repair Kit to suit B-502, B-504, B-507 and B-508

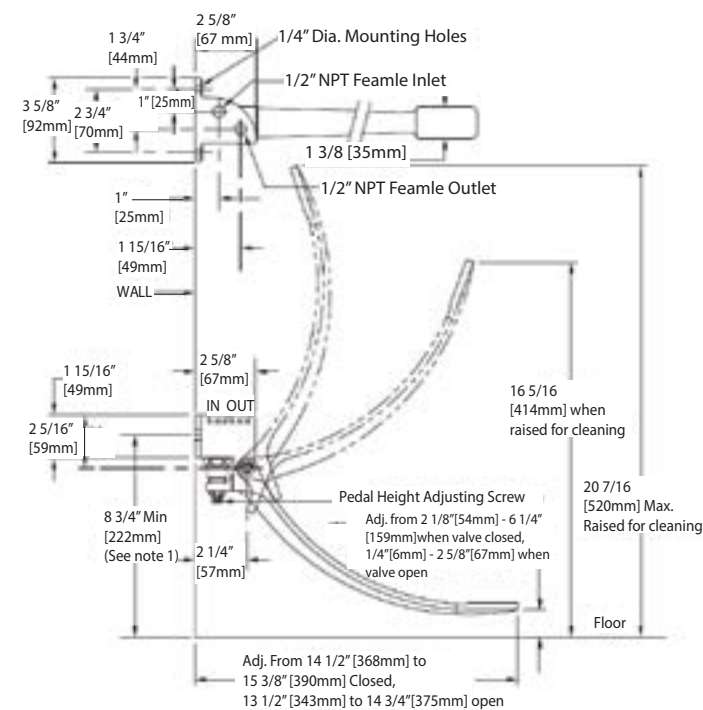

Note: All pedal position dimensions are based on a recommended min. MTG height of 8 3/4" [222mm] above finished floor.

DOUBLE WALL MOUNTED PEDAL VALVE



The double wall mounted pedal valve has a brass body with a polished chrome plated finish. It can be used for hot and cold water.


SPECIFICATIONS:

- > Wall mounted
- > Extended hot & cold pedals
- > Aluminium pedal with satin finish
- > Pedals flip upward for ease of cleaning

PRODUCTS:

B-504-K - Double pedal valve, wall mount
w/ gooseneck outlet


B-50P - Repair Kit to suit B-502, B-504, B-507 and B-508

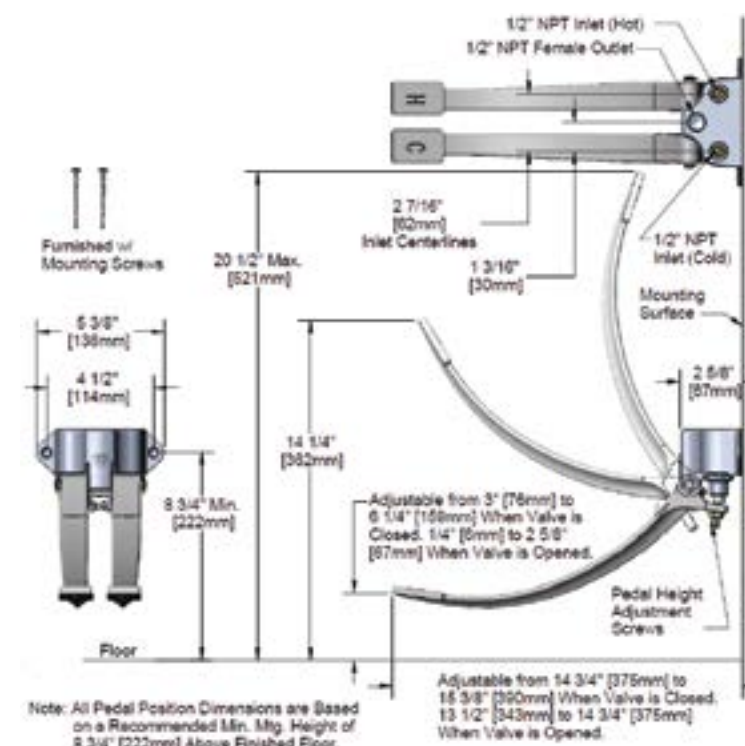

Note: All Pedal Position Dimensions are Based on a Recommended Min. Mtg. Height of 8 3/4" (222mm) Above Finished Floor.

Adjustable from 14 3/4" [375mm] to 15 3/8" [390mm] When Valve is Closed
13 1/2" [343mm] to 14 3/4" [375mm] When Valve is Opened.

SINGLE FLOOR MOUNTED PEDAL VALVE

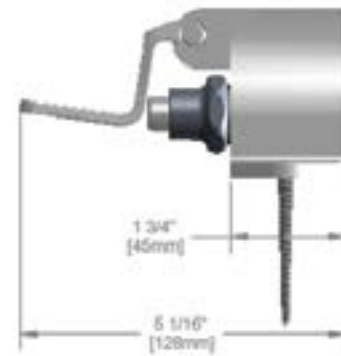


The single floor mounted pedal valve has a brass body with a polished chrome plated finish. It can be used for hot or cold water.

SPECIFICATIONS:

- > Single floor mounted pedal
- > Self closing valve


PRODUCTS:

- B-507-K - Single pedal valve, floor mount w/ gooseneck outlet
- B-50P - Repair Kit to suit B-502, B-504, B-507 and B-508

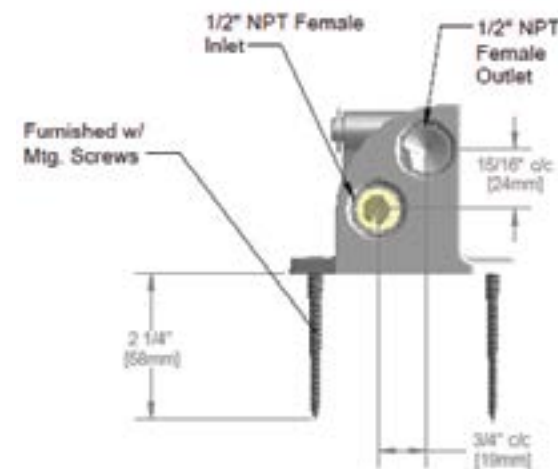

Note: All pedal position dimensions are based on a recommended min. MTG height of 8 3/4" [222mm] above finished floor.

DOUBLE FLOOR MOUNTED PEDAL VALVE

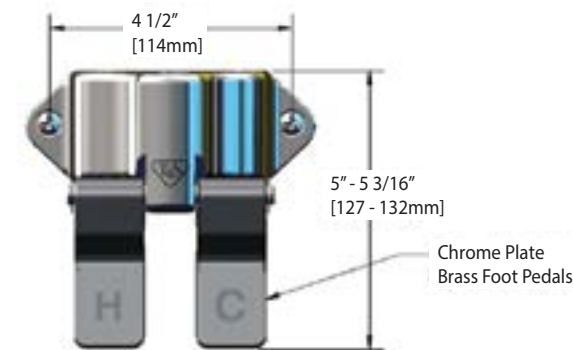


The double floor mounted pedal valve has a brass body with a polished chrome plated finish. It can be used for hot and cold water.

SPECIFICATIONS:

- > Double floor mounted pedal
- > Self closing valve

PRODUCTS:

- B-502-K - Single pedal valve, floor mount w/ gooseneck outlet
- B-50P - Repair Kit to suit B-502, B-504, B-507 and B-508

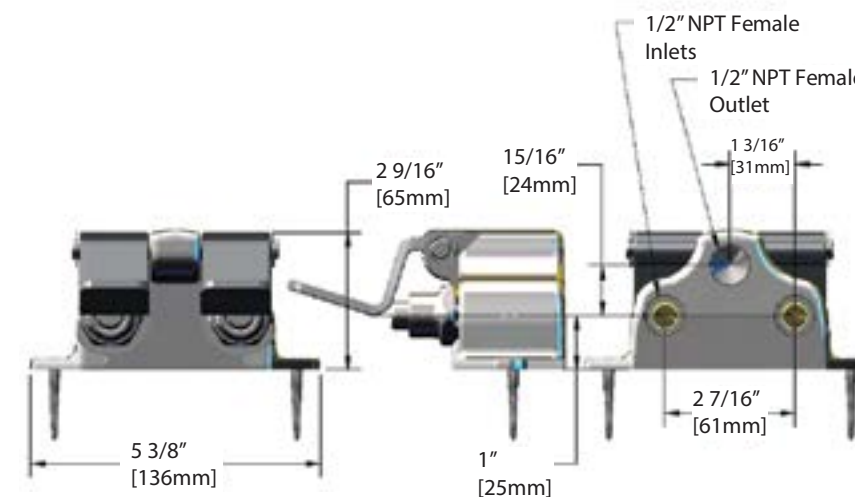

Note: All pedal position dimensions are based on a recommended min. MTG height of 8 3/4" [222mm] above finished floor.

URN TAP



DM-800

The urn tap will pour boiling hot water safely from a urn. Can be used to make tea or coffee.

SPECIFICATIONS:

- > Chrome plated brass
- > 15mm male extension & 3/8 BSP Female

MODELS:

- DM-800 Urn tap
- DSP-800 Urn tap top assembly



DSP-800

TWIST WASTE VALVE



B-3952



1409226

The twist waste valve provides practical drainage when avoiding dirty or contaminated water. It has a heavy wall cast bronze body, stainless steel sink contact components and nickel-plated wearing parts.

SPECIFICATIONS:

- > Fast drainage when opened
- > Positive sealing when closed
- > Includes PVC adaptor - 1409226
- > Valves available with outlet adaptors
- > To fit sink opening of 89mm or 3 1/2"
- > Fits drain outlet 51mm or 2"
- > Replacement parts available

MODEL:

- B-3952 Twist waste valve



B-3952

WASHDOWN GUN



The washdown gun is designed to last and provides adjustable stream from solid to soft spray as well as efficient and easily controlled water supply.


SPECIFICATIONS:

- > Heavy duty stainless steel construction
- > Blue rubber cover
- > Automatic shut-off
- > 1000kPa max. inlet water pressure
- > 90°C max. inlet water temperature
- > 15mm female inlet

MODELS:

- | | |
|------------|--------------------------|
| MV-0522 | Heavy duty spray gun |
| MV-0522KIT | Repair kit for spray gun |

AQUALISA TIMED FLOW CONTROL KIT

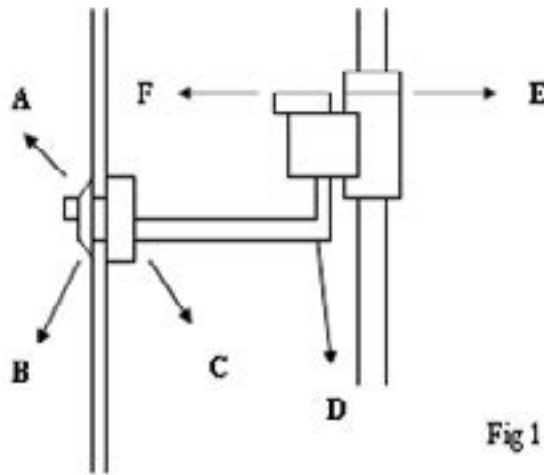

- | | |
|----------------------|---------------------|
| A – Push Button Assy | B – Rubber Washer |
| C – Back Nut | D – Air Tube |
| E – Pneumatic Valve | F – Adjusting Screw |

The Aqualisa Timed Flow Control Kit consists of an air operated solenoid valve and push button. The solenoid valve is easily adjusted to deliver a flow of water between 5 seconds to 60 seconds.

SPECIFICATIONS:

- > Kit includes air operated solenoid valve and push button.
- > Easily adjusted flow delivery
- > Adjustable from 5 secs to 60 secs
- > Factory preset to 5 seconds

MODEL:

905101 - Aqualisa Timed Flow Control Kit

BENCH MOUNT EXPOSED TAP PRE-RINSE UNIT



Z-8410X1



Z-8410X1PF



The bench mount exposed tap pre-rinse unit is heavy duty and commercially designed with a fully adjustable wall bracket and ceramic disc for extended life and smooth operation. The spray design is for superior cleaning power and water efficient at 5L/min. Suitable for any commercial kitchen.

MODELS:

- > Z-8410X1 - Pre-rinse unit with adjustable centre bench mount tap set, wall bracket, 900mm hose & spray gun
- > Z-8410X1PF6 - Pre-rinse unit with adjustable centre bench mount tap set, add on pot filler tap with 150mm outlet, wall bracket, 900mm hose & spray gun
- > Z-8410X1PF12 - Pre-rinse unit with adjustable centre bench mount tap set, add on pot filler tap with 300mm outlet, wall bracket, 900mm hose & spray gun

AVAILABLE SIZES (MM):

- > 150 or 300 pot filler
- > 900 (standard), 1200, 1500, 1800, 2400 hoses available

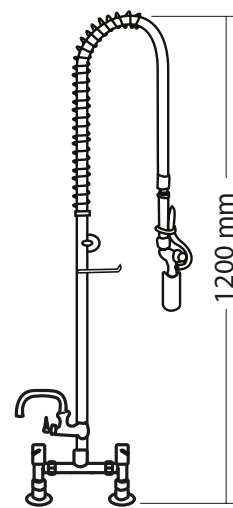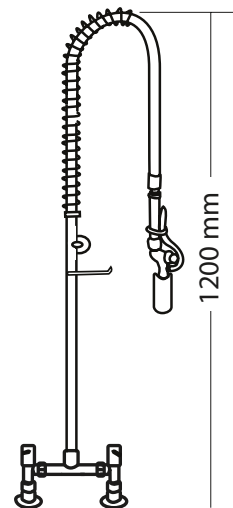

BENCH MOUNT SINGLE TAP PRE-RINSE UNIT



Z-825X1



Z-825X1PF



The bench mount single tap pre-rinse unit is heavy duty and commercially designed with a fully adjustable wall bracket and ceramic disc for extended life and smooth operation. The spray design is for superior cleaning power and water efficient at 5L/min. Suitable for any commercial kitchen.

MODELS:

- > Z-825X1 - Pre-rinse unit with bench mount single tap, wall bracket, 900mm hose & spray gun
- > Z-825X1PF6 - Pre-rinse unit with bench mount single tap, add on pot filler tap with 150mm outlet, wall bracket, 900mm hose & spray gun
- > Z-825X1PF12 - Pre-rinse unit with bench mount single tap, add on pot filler tap with 300mm outlet, wall bracket, 900mm hose & spray gun

AVAILABLE SIZES (MM):

- > 150 or 300 pot filler
- > 900 (standard), 1200, 1500, 1800, 2400 hoses available

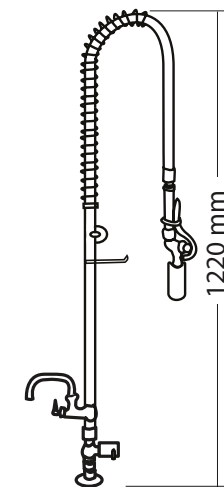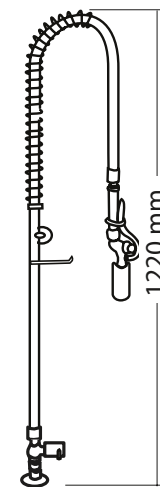

BENCH MOUNT DOUBLE TAP PRE-RINSE UNIT



Z-826X1



Z-826X1PF



The bench mount double tap pre-rinse unit is heavy duty and commercially designed with a fully adjustable wall bracket and ceramic disc for extended life and smooth operation. The spray design is for superior cleaning power and water efficient at 5L/min. Suitable for any commercial kitchen.

MODELS:

- > Z-826X1 - Pre-rinse unit with bench mount mixer tap, wall bracket, 900mm hose & spray gun
- > Z-826X1PF6 - Pre-rinse unit with bench mount mixer tap, add on pot filler tap with 150mm outlet, wall bracket, 900mm hose & spray gun
- > Z-826X1PF12 - Pre-rinse unit with bench mount mixer tap, add on pot filler tap with 300mm outlet, wall bracket, 900mm hose & spray gun

AVAILABLE SIZES (MM):

- > 150 or 300 pot filler
- > 900 (standard), 1200, 1500, 1800, 2400 hoses available

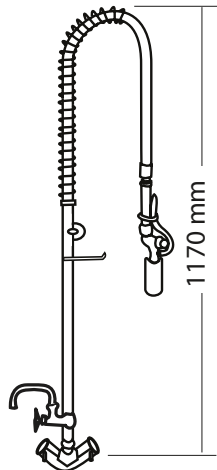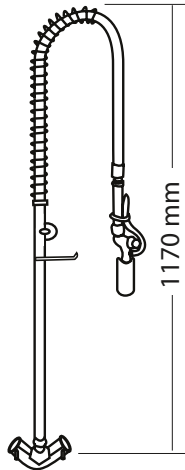

EXPOSED WALL MOUNT TAP PRE-RINSE UNIT



Z-842X1



Z-842X1PF



The exposed wall mount tap pre-rinse unit is heavy duty and commercially designed with a fully adjustable wall bracket and ceramic disc for extended life and smooth operation. The spray design is for superior cleaning power and water efficient at 5L/min. Suitable for any commercial kitchen.

MODELS:

- > Z-842X1 - Pre-rinse unit with wall exposed tap, wall bracket, 900mm hose & spray gun
- > Z-842X1PF6 - Pre-rinse unit with wall exposed tap, add on pot filler tap with 150mm outlet, wall bracket, 900mm hose & spray gun
- > Z-842X1PF12 - Pre-rinse unit with wall exposed tap, add on pot filler tap with 300mm outlet, wall bracket, 900mm hose & spray gun

AVAILABLE SIZES (MM):

- > 150 or 300 pot filler
- > 900 (standard), 1200, 1500, 1800, 2400 hoses available

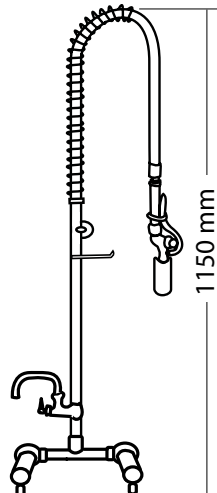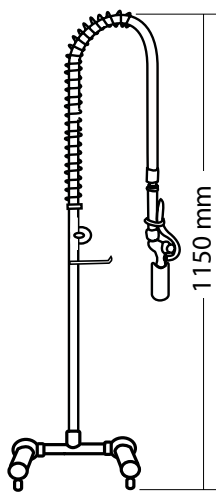



ZURN AUSTRALIA

ABN: 12 164 922 758



PHONE | **1300 00 ZURN**

EMAIL | **salesaus@zurn.com**

HEAD OFFICE | VICTORIA
49 Lakeside Drive
Broadmeadows VIC 3047
Fax: +61 3 9357 1455

QUEENSLAND
3 / 11 Breene Place
Morningside QLD 4170
Fax: +61 7 3396 7066

NEW SOUTH WALES
Unit 6 / 3-11 Hallmark Street
Pendle Hill NSW 2145
Fax: +61 2 9631 2065

WESTERN AUSTRALIA
398 Victoria Road
Malaga WA 6090
Fax: +61 8 9249 8922

NORTHERN TERRITORY
Unit 4 / 10 Witte Street
Winnellie NT 0820
Fax: +61 8 8947 0036